



Acoustic Wall Panels

The foundation of the Quiet Canvas collection. Crafted from PET felt, these customizable acoustic panels reduce unwanted noise while enhancing your space with modern design. Easy to install, sustainable, and made to fit your style.

Colors



SMOKE



CHERRY RED



APPLE GREEN



SKY BLUE



SAND



YELLOW



WHITE



EBONY



CAST



MINERAL



ARMOR



LATTE



TIMBER



COCOA



ASH



SAGE



CINNAMON



ALOE



OLIVE



PALM



MINT



ATLANTIC



SLATE BLUE



INDIGO



LAVENDER



PLUM



HOT PINK



ARIES



CORAL



PERIWINKLE



OXFORD



ADMIRAL

Shapes



LARGE SQUARE

23.75" x 23.75"



SQUARE

11.875" x 11.875"



QUARTER

5.94" x 5.94"



PIXEL

2.94" x 2.94"



LG. HALFLAP

23.75" x 11.875"



HALF

11.875" x 5.94"



SHIPLAP

23.75" x 5.94"



MINI SHIPLAP

11.875" x 2.94"



LG. HALF CIRCLE

23.75" x 11.875"



QUARTER CIRCLE

11.875" x 11.875"



HALF CIRCLE

11.875" x 5.875"



LG. DIAMOND

20.5" x 11.75"



SM. DIAMOND

10.25" x 5.875"



LG. TRIANGLE

11.75" x 11.75"



SM. TRIANGLE

5.875" x 5.875"



90° TRIANGLE

11.875" x 11.875"




HEX

10.25" x 11.75"


Large 2'x2' Engraved Tiles




BLANK




LARGE PARALLEL




TANGENT




ZEN




OFFSET



TOPO




CONVERGE



SUBWAY

Specification

Designed with precision-cut 45° beveled edges, these PET felt panels create a clean and seamless transition between adjoining pieces. Engineered to improve acoustic comfort, they help reduce unwanted noise while offering extensive customization through a variety of shapes, colors, and engraved pattern options. Made using recycled materials, each panel combines sustainability with modern design flexibility. The specifications on this page apply to individual panels.

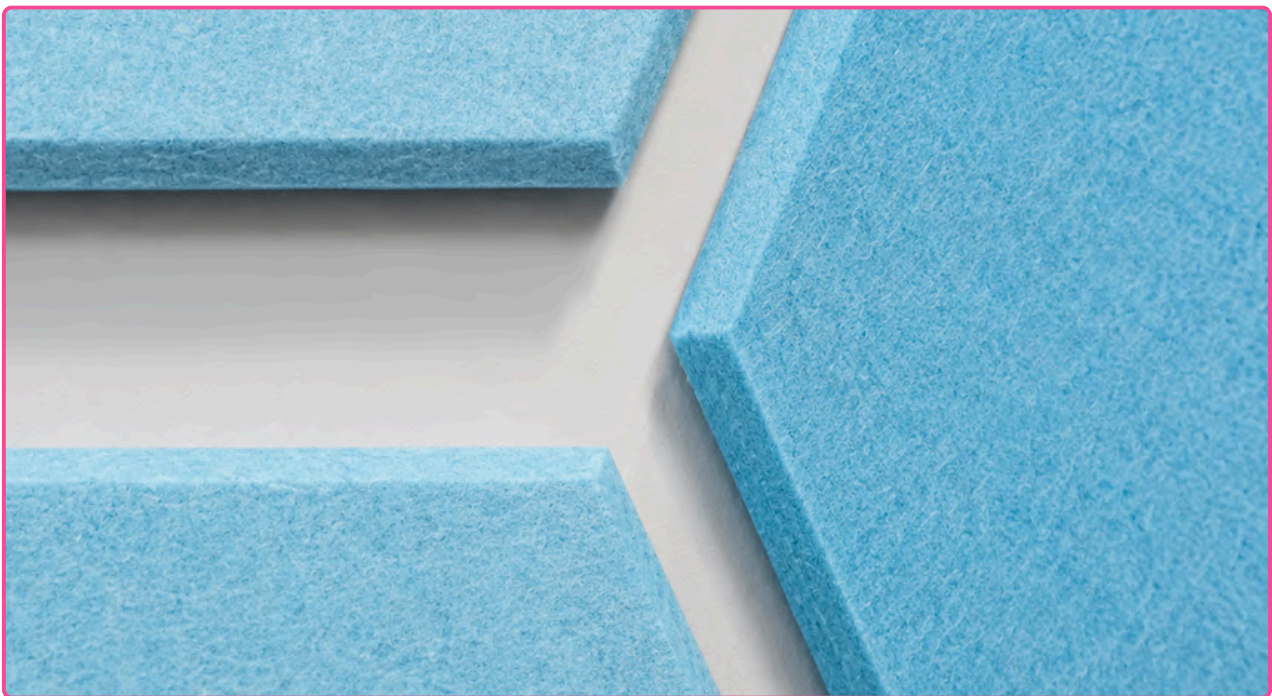

MATERIAL: 100% PET Felt (Made with Recycled Content)

THICKNESS: 9mm (18mm available upon request)


FIRE RATING: ASTM E84 Class A

NRC: 0.35

Acoustics


Quiet Canvas PET felt panels have been tested in accordance with ASTM C423 standards and achieve an NRC rating of 0.35, helping reduce reflected sound energy by approximately 35% on average. Acoustic performance varies across frequencies, with the panels effectively absorbing sounds above 300 Hz and delivering their strongest performance within the frequency range most important for speech clarity, helping create quieter and more comfortable interior environments.

FREQUENCY (HZ)	ABSORPTION COEFFICIENT	TOTAL ABSORPTION (SABINS)
100	0.04	2.59
200	0.00	0.05
400	0.10	6.91
800	0.34	24.62
1000	0.44	31.61
2000	0.73	52.69
3000	0.87	60.54
4000	0.96	69.00
5000	1.03	74.29

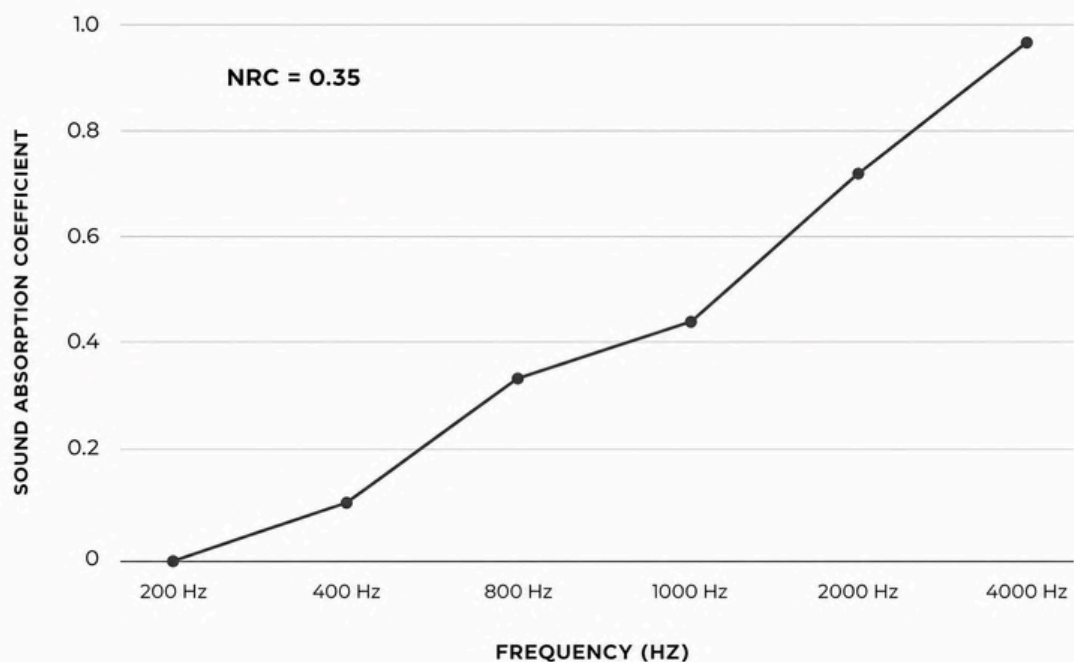

Installation

Panels can be installed using double-sided adhesive glue drops directly onto the wall. For certain wall surfaces, panel sizes, or long-term installations, an appropriate construction adhesive may also be recommended to ensure a secure bond.

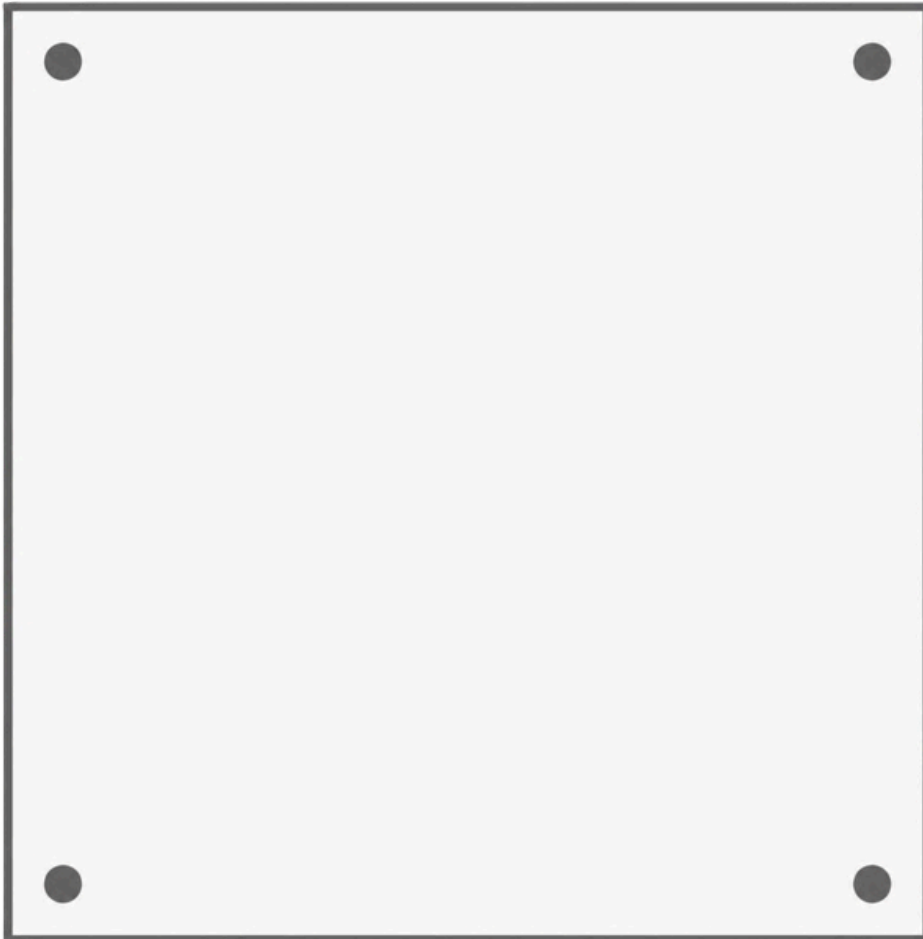

**Double-Sided Adhesive
Glue Drops**

Cleaning & Maintenance

Quiet Canvas PET felt panels are easy to clean and maintain. Simply remove dust with a lint roller or vacuum using a soft brush attachment. For small stains or marks, wipe gently with a soft cloth and mild cleaner. With basic care, your panels will continue to look great and perform well for years.



Sustainability & Material

Quiet Canvas panels are made from high-quality PET felt with recycled content, helping reduce plastic waste while creating beautiful spaces. They are free from VOCs, formaldehyde, and other harmful chemicals, making them safe for homes, offices, schools, and commercial environments. Designed with sustainability in mind, Quiet Canvas panels combine environmental responsibility with lasting performance.